

## ISO 1

### Features

- For amplifier with 11-pole DIN-plug
- Screw connections
- Mounting on DIN-rail NS 35/7,5



### Order table

Description	Order code
For connecting and DIN-rail mounting of amplifier with DIN-plug	ISO 1


### Technical Data

Rated current / Rated voltage	12 A / 300 VAC (CSA) 10 A / 300 VAC (UL)
Dielectric strength adjacent contacts	2500 V


Connection data	
Conductor cross section solid and stranded	min. 0,5 mm <sup>2</sup> max. 2,5 mm <sup>2</sup>
Conductor cross section AWG	min. 20 max. 14
Stripping length	7 mm
Screw thread	M3

General data	
Width	38 mm
Height	65 mm
Color	Black
Ambient temperature (operation)	-25 °C ... +85 °C
Approvals	CE, UL, RoHS

### Dimension drawing (in mm)

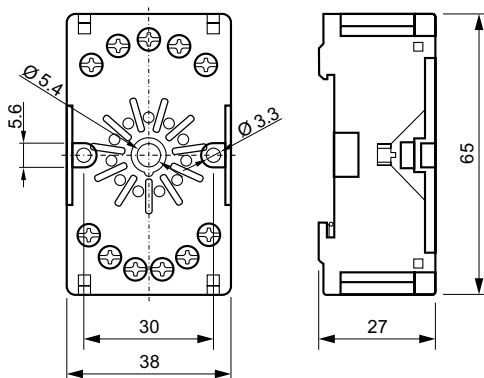

### Connection diagram

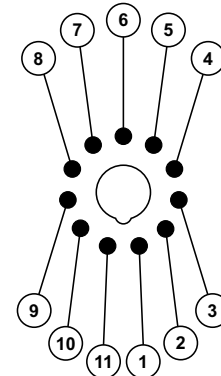

### Accessories



Description	Order code
Retaining clip for a reliable mounting of amplifiers on the DIN-socket by vibrations material: stainless steel	RTC 11

Subject to availability. Rights of modification reserved.

DS190307EN - 03/2019